







Sonesse® 30

Quiet drive motorisation for small to medium sized interior blinds



Main characteristics

- Quiet drive operation
- Highest torque within Somfy 24 V DC motors: 2Nm
- 3 versions – Dry Contact, RTS and RS485*
- Reset and manual operation button on the motor head
- Adjustable speed (from 6 to 28 rpm)
- Regulated speed for precise operation and alignment of blinds
- White slim line motor head – discreet solution within the blind
- Can be adapted to a wide range of tube and headrail profiles

Applications



Roller Blinds



Projection Screens



Venetian Blinds



Roman Blinds

Control Technology

RTS

Dry contact

RS485

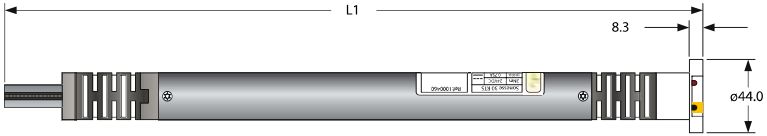



Technical data

	Sonesse 30 DCT	Sonesse 30 RTS	Sonesse 30 RS485
Supply Voltage	24Vdc	24Vdc	24Vdc
Current	800mA	800mA	800mA
Torque	2NM	2NM	2NM
Speed	28 rpm	28 rpm	28 rpm
Length L1 (mm)	406 ±2	406 ±2	406 ±2

** Confirm availability with Somfy customer services prior to ordering.*

Supply cable

24Vdc connection
2 core – 2.5M length



DCT connection
4 core



RS485 connection
3 core

