
Nice
New
Era Inn Edge
S Li-ion
tubular battery motor

Nice

Era Inn Edge S Li-ion

Wireless, rechargeable motors



Tubular motors with integrated lithium ion battery technology. Eliminates the need for a wired connection or external power supply, allowing easy installation and set-up.

Era Inn Edge S Li-ion is the perfect solution for residential and commercial renovations without the need for existing wires.

USB C recharge compatibility with optional magnetic connector

LEDs display state of charge and diagnostics

The only battery motor with perfect hembar alignment every time

Touch control Go-To Position

Ultra-quiet 35 dB

App control

For indoor blinds



Easy Installation

SCAN ME

Nice

Era Inn Edge
S Li-ion

For interior roller blinds - with electronic limit switch, built-in radio receiver and integrated rechargeable battery.

S size ø 35 mm



Obstacle detection while opening and closing.

Perfect blind alignment, even with multiple installations: constant motor speed under all load conditions allows Era Li-ion to be the only battery motor with perfect hembar alignment every time.

LED status lights indicate battery state of charge and diagnostics.

Go To Position function:
simply touch the desired position on the touchbar of a compatible transmitter to move the blinds to this position.

Constant speed up/down.

Adjustable open and close speed via touchbar slider.

Electronically controlled Soft Start and Soft Stop functions enables Smooth Move technology.

On/Off switch makes programming multiple motors simple.

NEW

Lithium-ion

5 YEAR WARRANTY

TECHNICAL SPECIFICATION

Code	Description	Pcs./pack	Certificates
E EDGE SI 288DC	Electronic limit switch, built-in radio receiver and integrated rechargeable battery. 2 Nm, 28 rpm	1	CE

Code	**E EDGE SI 288DC**
MECHANICAL FEATURES	
Motor Diameter Ø	35 mm
Lenght «L» (mm)	530
Protection Class	IP30
TECHNICAL FEATURES	
Torque (Nm)	2
Nominal speed (rpm)	28
Working temperature	0 - 60 °C / 32 - 140 °F
Noise [dB(A)]*	35
Radio	433 MHz monodirectional (F-CODE)
BATTERY FEATURES	
Battery type	Lithium-Ion
Battery life (months, 1 cycle/day)	12
Capacity (Wh)	45
RECHARGE DISTINCTIVE FEATURES	
Connector	USB TYPE C (magnetic connector optional)
Recharge system	USB PD up to 60W
Recharge speed (h)	1.5 (approx.)

*Noise level measured in accordance with EN ISO 3745, EN ISO 3746, EN 60704-1. Noiseless brake.

DIMENSIONS

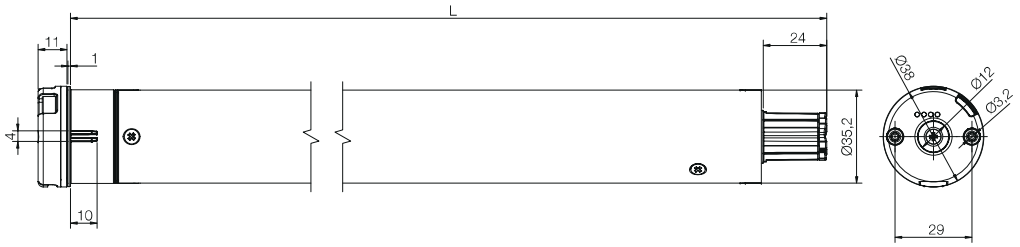

Nice connectivity

NEO
NEO Smart Controller.

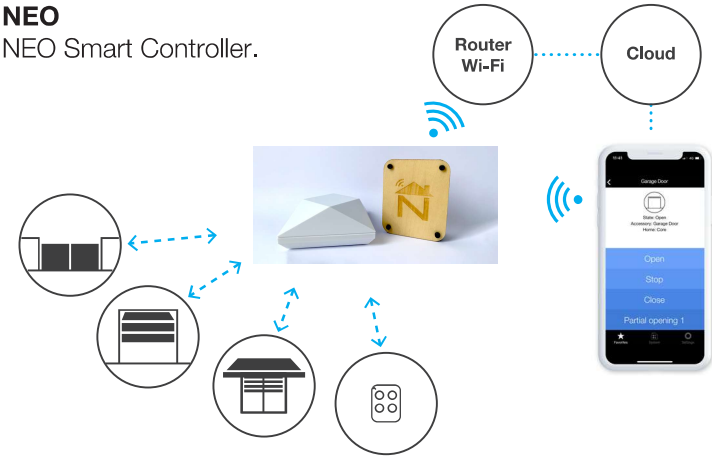

MyNice Welcome App
Available free on

Download on the App Store
GET IT ON Google Play

Nice control devices



Era P and Era W Series
Portable and wall-mounted transmitters

Ergonomic design and intuitive use for this line of transmitters to control indoor blind automations with touchbar slider for the “Go to Position” function.
Available in one and six channel version.
Up to six groups of automations can be controlled in single, group, or multigroup mode.



Air
Wall-mounted touchless radio transmitter

With its elegant design, Air is the perfect solution for all applications. Perfectly suited for public, high traffic or sterile areas. The ideal solution to add a touch of elegance and a contemporary feel to the home or office.
For controlling one automation or group of automations.

We make even the smallest of gestures extraordinary.

Nice,
a world without barriers.

Automation and control systems for gates, garage doors, blinds, awnings and rolling shutters and alarm systems for all types of space, from private homes to large public buildings.

www.niceforyou.com

Nice SpA
Oderzo, TV, Italy

Nice

NiceLoveEarth

Nice cares for the environment.
Using natural paper it avoids excessive use of raw materials and forest exploitation.
Waste is reduced, energy is saved and climate quality is improved.

The information shown in this publication is purely indicative. Nice reserves the right to make any modifications to the products as it sees fit. **Product Design** Roberto Gherlenda.